




- (b) (i) A continuous time signal  $x(t)$  is shown in figure below, Sketch and label each of the following signals.  
 $x(t-2)$ ,  $x(2t+3)$ ,  $x\left(\frac{3}{2}t\right)$ , and  $x(-t+1)$ . (4)



- (ii) Determine the energy and power of the given signal (4)

$$x[n] = \cos\left[\frac{\pi}{4}n\right]$$


- (iii) Check whether the given system is Linear/nonlinear, Time Variant /Time Invariant, Causal/Non-causal  $y[n] = x[n] - x[n-1]$ . (5)

12. (a) Find the Fourier transform of each of the following signals and sketch the magnitude and phase as a function of frequency, including both positive and negative frequencies (13)

- (i)  $\delta(t-5)$   
(ii)  $e^{-at}u(t)$  a real, positive.


Or

- (b) (i) Determine the Fourier Series representation of the given full wave rectifier. (8)

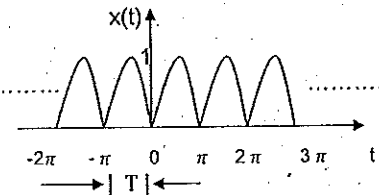

13. (a) (i) List the properties of Laplace transform and write its ROC. (5)  
(ii) Consider the cascade interconnection of three stage causal LTI system with impulse response  $h_1[n]$ ,  $h_2[n]$  and  $h_3[n]$  as shown in figure below. The impulse response  $h_2[n] = u[n] - u[n-2]$ . The overall impulse response  $h[n]$  is given in the figure below.



$$x[n] \rightarrow [h_1[n]] \rightarrow [h_2[n]] \rightarrow [h_2[n]] \rightarrow y[n]$$

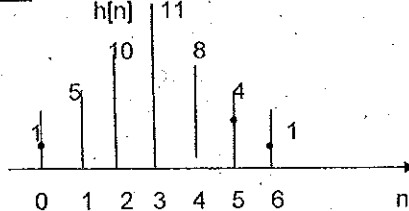

Find the impulse response  $h_1[n]$  and the response  $y[n]$  of the overall system to the input  $x[n] = \delta[n] - \delta[n-1]$ . (9)

- (ii) Let  $h(t)$  be a triangular pulse and let  $x(t)$  be the impulse train. Determine and sketch  $y(t)$  for the following values of  $T$ . (4)

- (1)  $T = 4$  (2)  $T = 2$  (3)  $T = 1$  (4)  $T = 3/2$ .



- (b) (i) Find the convolution between  $x[n]$  and  $h[n]$ , where  
 $x[n] = (\alpha)^n u[n]$ ;  $0 < \alpha < 1$  and  $h[n] = u[n]$ . (6)

- (ii) Find the convolution of  $x(t)$  and  $h(t)$  (7)

$$x(t) = \begin{cases} 2 & \text{for } -2 \leq t \leq 2 \\ 0 & \text{otherwise} \end{cases} \text{ and } h(t) = \begin{cases} 4 & \text{for } 0 \leq t \leq 2 \\ 0 & \text{otherwise} \end{cases}$$

14. (a) (i) Find the inverse Laplace transform of  $\frac{s+4}{2s^2+5s+3}$ ; Roc :  $Re\{s\} > -1$ . (4)

- (ii) Consider the LTI system with impulse response  $h[n] = (\alpha)^n u[n]$ ;  $|\alpha| < 1$  and  $x[n] = (\beta)^n u[n]$ ;  $|\beta| < 1$ . Find the response of the LTI system. (9)

Or

- (b) (i) Consider a discrete-time LTI system with impulse response  $h[n] = \left[\frac{1}{2}\right]^n u[n]$ . Use Fourier transform to determine the response

$$\text{of the system to the input } x[n] = \left[\frac{3}{4}\right]^n u[n]. \quad (6)$$

- (ii) A difference equation of the system is given as,  
 $y(n) - y(n-1) + \frac{1}{4}y(n-2) = x(n) + \frac{1}{4}x(n-1) - \frac{1}{8}x(n-2)$ .

Determine the transfer function of the inverse system. Check whether the inverse system is causal and stable. (7)

15. (a) (i) Find the inverse Z-transform of  
 $X(z) = \frac{1 - (1/2)z^{-1}}{1 + (3/4)z^{-1} + (1/8)z^{-2}}$ ;  $|Z| > \frac{1}{2}$ . (8)

- (ii) Compute discrete-time Fourier Transform of  $x(n) = a^n$  for  $0 \leq n \leq N-1$ . (5)

Or

- (b) (i) Determine the Z-transform and ROC of the given sequence. (5)

$$x[n] = \left(\frac{-1}{3}\right)^n u[n] - \left(\frac{1}{2}\right)^n u[-n-1]$$

- (ii) Obtain the direct form I and direct form II realizations of the LTI system. (8)

$$y(n) = -\frac{3}{8}y(n-1) + \frac{3}{32}y(n-2) + \frac{1}{64}y(n-3) + x(n) + 3x(n-1) + 2x(n-2)$$

PART C — (1 × 15 = 15 marks)

16. (a) (i) A system in which the sampling signal  $p(t)$  is an impulse train with alternating sign is given in the figure 16(a). The Fourier transform  $X(\omega)$  of the input signal are  $x(t)$  and the Fourier transform  $H(\omega)$  as indicated in the figure 16. (11)

