

- (b) An analog signal having 4 KHz bandwidth is sampled at 1.25 times the Nyquist rate and each sample is quantized into one of 256 equally likely levels. Assume that the successive samples are statistically independent.
- What is the information rate of this source?
 - Can the output of this source be transmitted without error over an AWGN channel with a bandwidth of 10 KHz and an S/N ratio of 20 dB?
 - Find the S/N ratio required for error-free transmission for part (ii).
 - Find the bandwidth required for an AWGN channel for error-free transmission of the output of this source if the S/N ratio is 20 dB.

Reg. No. :

Question Paper Code : 80118

B.E./B.Tech. DEGREE EXAMINATIONS, APRIL/MAY 2019.

Third/Fourth Semester

Electronics and Instrumentation Engineering

EC 8395 — COMMUNICATION ENGINEERING

(Common to Computer Science and Engineering/Instrumentation and Control Engineering)

(Regulation 2017)

Time : Three hours

Maximum : 100 marks

Answer ALL questions.

PART A — (10 × 2 = 20 marks)

- What will be the power in each sideband in amplitude modulated signal if power of carrier wave is 176 W and there is 60% modulation?
- What is Pre-emphasis and De-emphasis circuit? Where these circuits are used?
- What is bit depth in PCM?
- What is Companding?
- What is Duobinary encoding? Why precoding is used.
- Draw the constellation diagram of QPSK.
- What is the need of channel coding?
- List the properties of cyclic codes.
- What are the benefits of multiple access techniques in the communication system?
- Define near-far problem in CDMA.

PART B — (5 × 13 = 65 marks)

11. (a) (i) The efficiency η of ordinary AM is defined as the percentage of the total power carried by the side bands, that is,

$$\eta = \frac{P_s}{P_t} \times 100\%$$

Where P_s is the power carried by the sidebands and P_t is the total power of the AM signal.

- (1) Find η for $\mu = 0.5$.

- (2) Show that for a single tone AM, η_{\max} is 33.3 percent at $\mu = 1$. (6)

- (ii) Explain the working of FM super heterodyne receiver with neat block diagram. (7)

Or

- (b) (i) Discuss the method for the generation of FM using direct method. (6)

- (ii) Explain the detection of FM using PLL detector. (7)

12. (a) Describe delta modulation in detail with neat block diagram. Also describe the quantization error in delta modulation.

Or

- (b) Draw and explain the TDM with its applications.

13. (a) (i) Derive the expression of probability of error in BPSK. (8)

- (ii) Explain QAM modulation system with its constellation and schematic diagrams. (5)

Or

- (b) Explain coherent detection of BFSK signal and derive the expression for Probability of error.

14. (a) (i) Consider a binary memoryless source X with two symbols x_1 and x_2 . Show that $H(X)$ is maximum when both x_1 and x_2 are equiprobable. (6)

- (ii) A discrete memoryless source X has four symbols x_1, x_2, x_3 and x_4 with $P(x_1) = 0.5$, $P(x_2) = 0.25$ and $P(x_3) = P(x_4) = 0.125$. Construct a Shanon-Fano code for X ; show that this code has the optimum property that $n_i = I(x_i)$ and that the code efficiency is 100 percent. (7)

Or

- (b) Consider the convolutional encoder shown in fig. 1.

- (i) Find the impulse response of the encoder.

- (ii) Find the output code word if the input code sequence is all 1's (1 1 1 1 1...)

- (iii) Discuss the result of (ii).

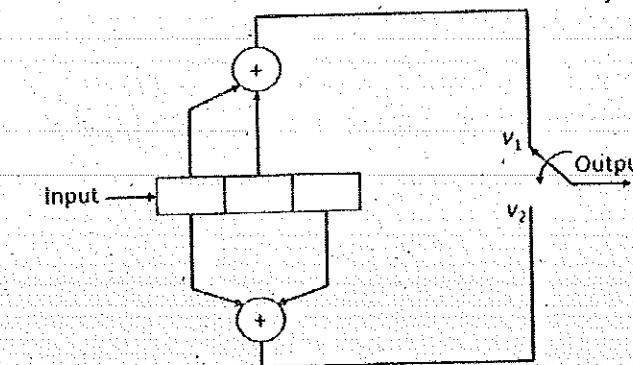


Fig. 1

15. (a) Explain the operation of FH-SS. Compare slow and fast FH-SS.

Or

- (b) Discuss the FDMA and TDMA techniques used in wireless communication with their merits and demerits.

PART C — (1 × 15 = 15 marks)

16. (a) A compact disk (CD) recording system samples each of two stereo signals with a 16-bit analog-to-digital converter (ADC) at 44.1 Kb/s.

- (i) Determine the output signal-to-quantization-noise ratio for a full-scale sinusoid.

- (ii) The bit stream of digitized data is augmented by the addition of error-correcting bits, clock extraction bits, and display and control bit fields. These additional bits represent 100 percent overhead. Determine the output bit rate of the CD recording system.

- (iii) The CD can record an hour's worth of music. Determine the number of bits recorded on a CD.

- (iv) For a comparison, a high-grade collegiate dictionary may contain 1500 pages, 2 columns per page, 100 lines per column, 8 words per line, 6 letters per word, and 7 b per letter on average. Determine the number of bits required to describe the dictionary and estimate the number of comparable books that can be stored on a CD.

Or