

Reg. No.

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Question Paper Code : 57143

B.E./B.Tech. DEGREE EXAMINATION, MAY/JUNE 2016

Third Semester

Civil Engineering

CE 6302 – MECHANICS OF SOLIDS

(Common to Environmental Engineering)

(Regulation 2013)

Time : Three Hours

Maximum : 100 Marks

Answer ALL questions.

PART – A (10 × 2 = 20 Marks)

1. State Hooke's Law.
2. What is the use of Mohr's Circle ?
3. Sketch the shear stress variation for symmetrical I section.
4. What is the differential relation between bending moment, shear force and the applied load ?
5. When do you prefer Moment area method ?
6. Explain the theorem of conjugate beam method.
7. A circular shaft is subjected to a torque of 10 kNm. The power transmitted by the shaft is 209.33 kW. Find the speed of shaft in revolution per minute ?
8. Compare close coiled and open coiled springs under the action of an axial load.
9. What is meant by Circumferential stress (or hoop stress) and Longitudinal stress ?
10. What are the formula for finding principal stresses of a thin cylindrical shell Subjected to internal fluid pressure p and a torque ?

PART - B (5 × 16 = 80 Marks)

11. A tensile test was conducted on a mild steel bar. The following data was obtained from the test :

- (i) Diameter of the steel bar = 3 cm
- (ii) Gauge length of the bar = 20 cm
- (iii) Load at elastic limit = 250 kN
- (iv) Extension at a load of 150 kN = 0.21 mm
- (v) Maximum load = 380 kN
- (vi) Total extension = 60 mm
- (vii) Diameter of rod at failure = 2.25 cm


Determine :

- (1) The Young's modulus (4)
- (2) The stress at elastic limit (4)
- (3) The percentage of elongation (4)
- (4) The percentage decrease in area. (4)

OR

- (a) Derive the relationship between bulk modulus and Young's modulus. (6)
- (b) Derive relations for normal and shear stresses acting on an inclined plane at a in a strained material subjected to two mutually perpendicular direct stresses. (10)


12. (a) Draw shear force and bending moment diagram for the beam given in Fig.

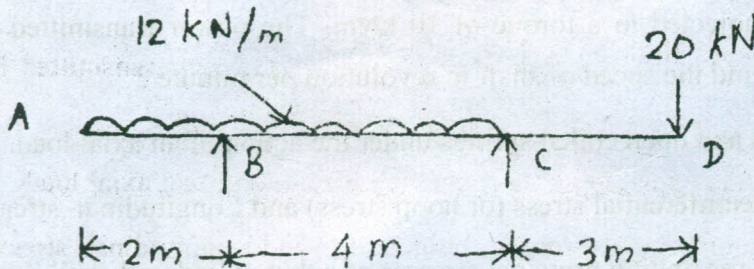

OR

- (b) The cross section of T beam is as follows : Flange thickness = 10 mm; width of the flange = 100 mm; thickness of the web = 10 mm; depth of the web = 120 mm; If a shear force of 2 kN is acting at a particular section of the beam, draw the shear stress distribution across the section.

13. (a) Using conjugate beam method, obtain the slope and deflections at A, B, C and D of the beam shown in fig. Take $E = 200 \text{ GPa}$ and $I = 2 \times 10^{-2} \text{ m}^4$.

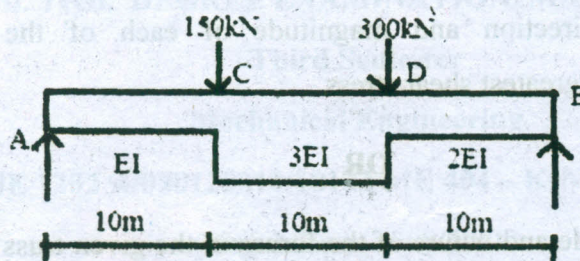

OR

- (b) A beam of length 6 m is simply supported at its ends and carries two point loads of 48 kN and 40 kN at a distance of 1 m and 3 m respectively from the left support.

Find :

- (i) Deflection under each load
- (ii) Maximum deflection
- (iii) The point at which the maximum deflection occurs.

Take $I = 85 \times 10^6 \text{ mm}^4$, $E = 2 \times 10^5 \text{ N/mm}^2$

14. (a) It is required to design a close coiled helical spring which shall deflect 1 mm under an axial load of 100 N at a shear stress of 90 MPa. The spring is to be made of round wire having shear modulus of $0.8 \times 10^5 \text{ MPa}$. The mean diameter of the coil is to be 10 times that of the coil wire. Find the diameter and length of the wire.

OR

- (b) A shaft has to transmit 110 kW at 160 rpm. If the shear stress is not to exceed 65 N/mm^2 and the twist in a length of 3.5 m must not exceed 1° , find a suitable diameter. Take $C = 8 \times 10^4 \text{ N/mm}^2$.

15. (a) A rectangular block of material is subjected to a tensile stress of 110 N/mm^2 on one plane and a tensile stress of 47 N/mm^2 on the plane at right angle to the former. Each of the above stress is accompanied by a shear stress of 63 N/mm^2 . Find (i) The direction and magnitude of each of the principal stress (ii) Magnitude of greatest shear stress.

OR

- (b) Find the magnitude and nature of the forces in the given truss carrying loads as shown in Fig.

